


REQUEST FOR ACCESS OF ABANDONED APPLICATION UNDER 37 CFR 1.14(a)

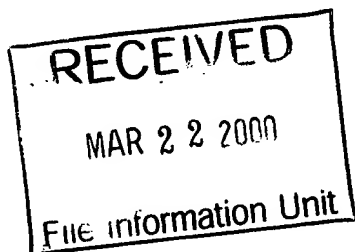

In re Application of

Application Number

06/852831

Filed

APR 15 86

Gross Art Unit

Examiner

Pauley

Paper No.

#14

Assistant Commissioner for Patents
Washington, DC 20231

I hereby request access under 37 CFR 1.14(a)(3)(vi) to the application file record of the above-identified ABANDONED application, which is: (CHECK ONE)

- ___ (A) referred to in United States Patent Number 4,885,571, column _____
- ___ (B) referred to in an application that is open to public inspection as set forth in 37 CFR 1.11, i.e., Application No. _____, filed _____, on page _____ of paper number _____
- ___ (C) an application that claims the benefit of the filing date of an application that is open to public inspection, i.e., Application No. _____, filed _____, or
- ___ (D) an application in which the applicant has filed an authorization to lay open the complete application to the public.

Please direct any correspondence concerning this request to the following address:

Signature

3-22-2000
Date

Typed or printed name

FOR PTO USE ONLY

Approved by:

(Initials)

Unit:

Depending upon the needs of the...

United States Patent [19]

Pauley et al.

[11] Patent Number: 4,885,571

[45] Date of Patent: Dec. 5, 1989

[54] TAG FOR USE WITH PERSONNEL MONITORING SYSTEM

[75] Inventors: James D. Pauley, Estes Park; Allen E. Rippling, Jr., Louisville, both of Colo.

[73] Assignee: B. I. Incorporated, Boulder, Colo.

[21] Appl. No.: 231,823

[22] Filed: Aug. 12, 1988

Related U.S. Application Data

[63] Continuation of Ser. No. 852,831, Apr. 15, 1986, abandoned.

[51] Int. Cl.⁴ G08B 23/00; H04B 1/34

[52] U.S. Cl. 340/573; 340/514; 340/825.49; 455/100

[58] Field of Search 340/572-576, 340/514-516, 539, 825.49; 455/100

[56] References Cited

U.S. PATENT DOCUMENTS

3,478,344 11/1969 Schwitzgebel 340/312
 3,882,277 5/1975 DePedro 179/2 DP
 3,898,984 8/1975 Mandel 128/2.1 A
 4,259,665 3/1981 Manning 340/575
 4,598,275 7/1986 Ross et al. 340/573
 4,622,544 11/1986 Bially et al. 340/573 X
 4,665,387 5/1987 Cooper et al. 340/572
 4,682,155 7/1987 Shirley 340/573
 4,747,120 5/1988 Foley 379/38

FOREIGN PATENT DOCUMENTS

2141006A 12/1984 United Kingdom

OTHER PUBLICATIONS

A. K. Schmidt, "Electronic Monitoring Equipment", NIJ Reports, Feb. 28, 1986.

"The GOSSlink"; National Incarceration Monitor and Control Services, Inc., (NIMCOS), N.M., 4 page brochure, (1983).

"CSD Home ESCORT Electronic Monitoring System: The Electronic Alternative to Jail and Prison for Probationers, Parolees, and Work Releases"; Control Data

Corporation, CD Corrections Systems, Minneapolis, Minn., 6 page brochure, (1985).

"Can You Spot The One Who's Doing Time?"; Control Data Corporation, CD Corrections Systems, 4 page fold-out brochure, (1985).

Meyer, "Crime Deterrent Transponder System"; IEEE Transactions on Aerospace and Electronic Systems; pp. 2-22, (Jan. 1971).

(List continued on next page.)


Primary Examiner—Glen R. Swann, III
 Assistant Examiner—Thomas J. Mullen, Jr.
 Attorney, Agent, or Firm—Fitch, Even, Tabin & Flannery

[57]

ABSTRACT

A tag for use with an individual monitoring system. The tag is worn by an individual being monitored, preferably on the ankle or leg where it can be concealed by the clothing of the individual. The tag is fully self contained and sealed. The circuits of the tag periodically generate an identification signal that includes an identification code. The identification signal modulates a stable RF signal that is transmitted in bursts of data words to a receiver associated with a field monitoring device (FMD) located at the monitoring location. In turn, the FMD may randomly establish communication with a central processing unit (CPU) located at a central monitoring location. Other information is included in the identification code of the tag, such as information indicating that an attempt has been made to remove the tag from the individual. The tag is held in place near the skin of it's wearer by a conductive strap that wraps around the leg or other limb of the individual. Two capacitive electrodes, one of which is realized with the conductive strap, function as the plates of a capacitor, with the body flesh serving as the dielectric material therebetween. By monitoring an alternating signal coupled from one capacitive electrode to the other, a determination can be made as to whether the tag has remained near the body flesh. Further, because the strap is conductive, a signal can be passed therethrough and a determination can be made as to whether the strap has been broken.

16 Claims, 6 Drawing Sheets

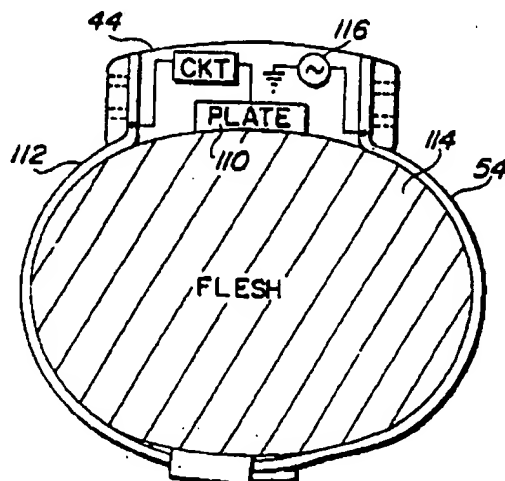

A069